
# @ Saeco





Rotating Plate

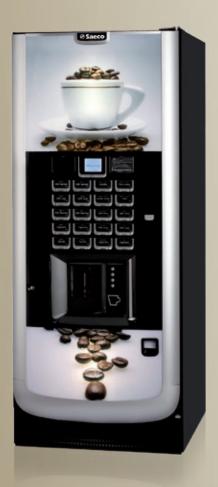

Power Boost



3 Way Pay



Easy Dry

## Atlante 700

### **Description**

Atlante 700 is the new and standard-setting generation of freestanding vending machines for hot beverages – stunningly impressive from every angle. Its innovative U-Profile design with soft and elegant lines adds style to every room.

Along with its generous capacity (up to 700 cups), superb choice (up to 60 different products) and supreme convenience thanks to the revolutionary Saeco Rotating Plate system this vending wonder is perfect for medium and large locations.

Atlante 700 creates a perfect coffee comer for any context, standalone or combined with the snack&food machine Aliseo, and offers a complete solution for Vending. With the relative kit it can be transformed into Master in association with Aliseo Slave. Available in Espresso with double grinder and double boiler, Espresso with one grinder and double boiler, and Instant versions.

#### **Accessories**

- Independent water tank kit
- Mixer kit for tea replacement with soluble mixer
- Hot water solenoid valve kit
- Memory key to copy and quickly transfer machine settings
- USB key kit
- Eva-Dts kit
- Atlante Master transformation kit

#### **Main features**

- Saeco Brewing Group with new pre-heating system Saeco Power Boost for excellent espresso (Espresso version)
- Generous container capacity
- Easy cleaning and maintenance thanks to the new Saeco Rotating Plate system
- Aesthetic and easily customizable U-Profile design with illuminated front
- User-friendly interface with LCD graphic display and easy-to-read and illuminated mechanical buttons
- Versatile dispensing area allowing cups with sizes up to 20 oz (592 ml)
- Possibility to install 3 payment systems on the door at the same time (Saeco 3 Way Pay)
- Accepts the most commonly used parallel and serial MDB, BDV and Executive (possible Master and Slave configurations) payment systems
- New powder dispensing system Saeco Easy Dry
- Water filter for preventing the formation of limestone
- The machine is designed for easy use even by persons with disabilities

#### **User** interface

- Direct access 20-button keypad for beverage selection
- 2 preselection keys: +/-sugar and 2 settable keys (decaffeinated/ barley, no-cup and only-cup options)
- Graphic LCD



#### Atlante 700 Atlante 700 Espresso Espresso Atlante 700 Technical data single grinder double grinder Instant and double boiler and double boiler Structural specifications 750 × 1830 × 865 mm 750 × 1830 × 865 mm 750 × 1830 × 865 mm Dimensions ( $w \times h \times d$ ) 189 kg Weight 192 kg 168 kg **Electrical specifications** 230 V/50 Hz 230 V/50 Hz 230 V/50 Hz Power supply 2300 W Power consumption Water specifications Boiler brass (600 cc) Espresso boiler stainless steel (4.5 I) Instant boiler stainless steel (4.5 I) stainless steel (4.5 I) Water connections 3/4" (I – 8 bar) 3/4" (I – 8 bar) 3/4'' (1 - 8 bar)Water connection standard: water supply standard: water supply standard: water supply Water supply optional: independent water tank kit optional: independent water tank kit optional: independent water tank kit Independent water tank 2 tanks of 20 l 2 tanks of 20 I 2 tanks of 20 l Other specifications 700 Cups (h 70 mm) 70 or 73 mm 70 or 73 mm 70 or 73 mm Cups type ø Stirrers 90 – 105 – 115 mm 90 – 105 – 115 mm 90 – 105 – 115 mm Available stirrers Coffee bean container 2 Instant product container 5 Sugar container Number of selections 20 Number of preselections Disc mixer 4 Spiral mixer 7 gr or 9 gr 7 gr or 9 gr Brewing unit Canisters capacity $1 \times 4.2 \text{ kg}$ 2 x 3.5 kg Coffee beans

#### **Technical specifications**

- Pre-galvanized and painted steel-sheet body
- · Containers and tanks in food-contact approved resin

1.2 kg

1.3 kg

3.5 kg

4.0 kg

4.5 kg

- Saeco Rotating Plate system
- Rielda lock

Instant coffee

Chocolate

Milk

Tea

Sugar

- Refill signal for water, coffee and cups
- Adjustable stirrer dispenser
- Electronically controlled boilers temperature
- Exhauster to absorb internal moisture and additional steam exhauster for the dispensing area
- Illuminated keypad, logo and promotional images
- Removable cup-releasing device for easy cleaning and checking
- 60 W electromagnetic vibration pump

- · Anti-overflow air-break device
- Simplified error reset

1.2 kg 1.3 kg

3.5 kg

4.0 kg

4.5 kg

- · Built-in utility outlet
- Boiler safety valve
- General safety relay for 24 V components
- Thermal cut-outs on all devices supplied with line voltage
- Safety and anti-boiling thermostats for instant products (Instant and double boiler versions)
- CE and VDE (Espresso version) approved









1.3 kg

3.5 kg

4.0 kg

3.0 kg

+

Atlante 700 Master